



Ersatzteilliste / Parts List
Liste de pièces de rechange

Tiefenmeißel
Subsoiler
Sous-soleuse

MELIOR M


Art.Nr. 175 1557

12.90


LEMKEN KG

Weseler Straße 5 ; D-4234 Alpen ; Postfach 11 60
Telefon (0 28 02) 81-0 ; Telex 8 12 838 ; Telefax (0 28 02) 81-220


Grundrahmen	Melior M/65
Basic frame	Melior M/65
Châssis de base	Melior M/65

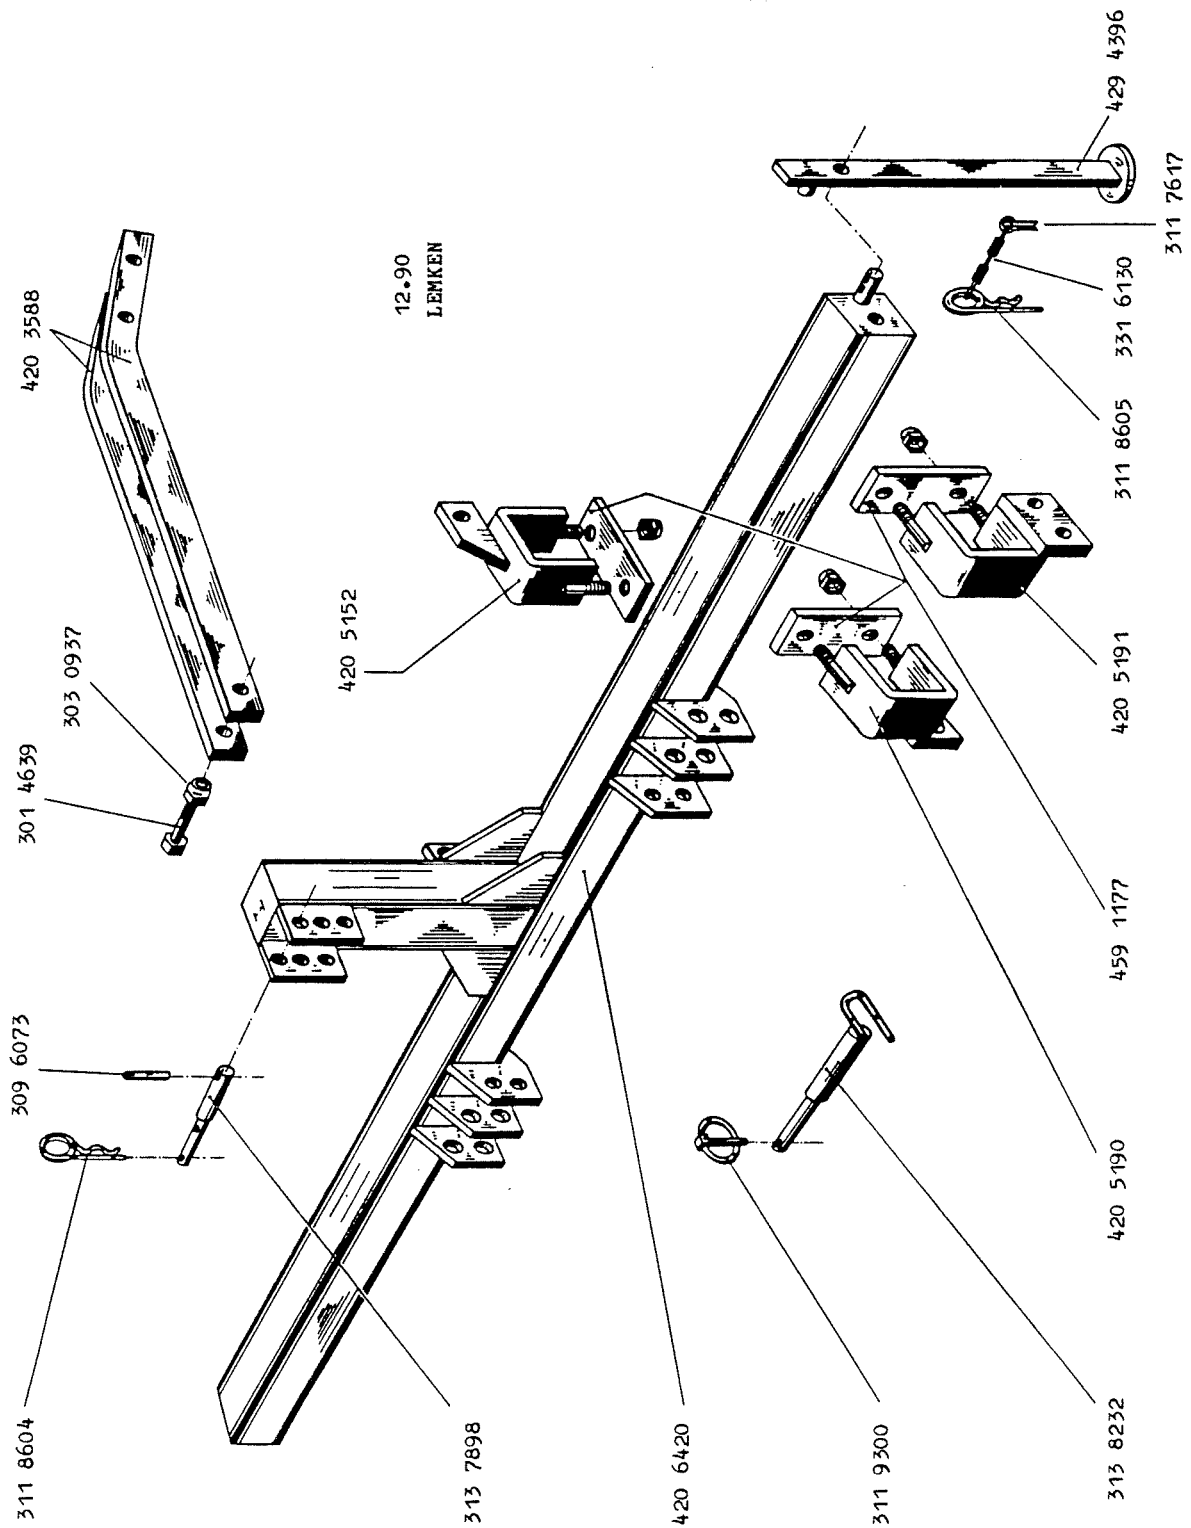


Grundrahmen	Melior M/85
Basic frame	Melior M/85
Châssis de base	Melior M/85

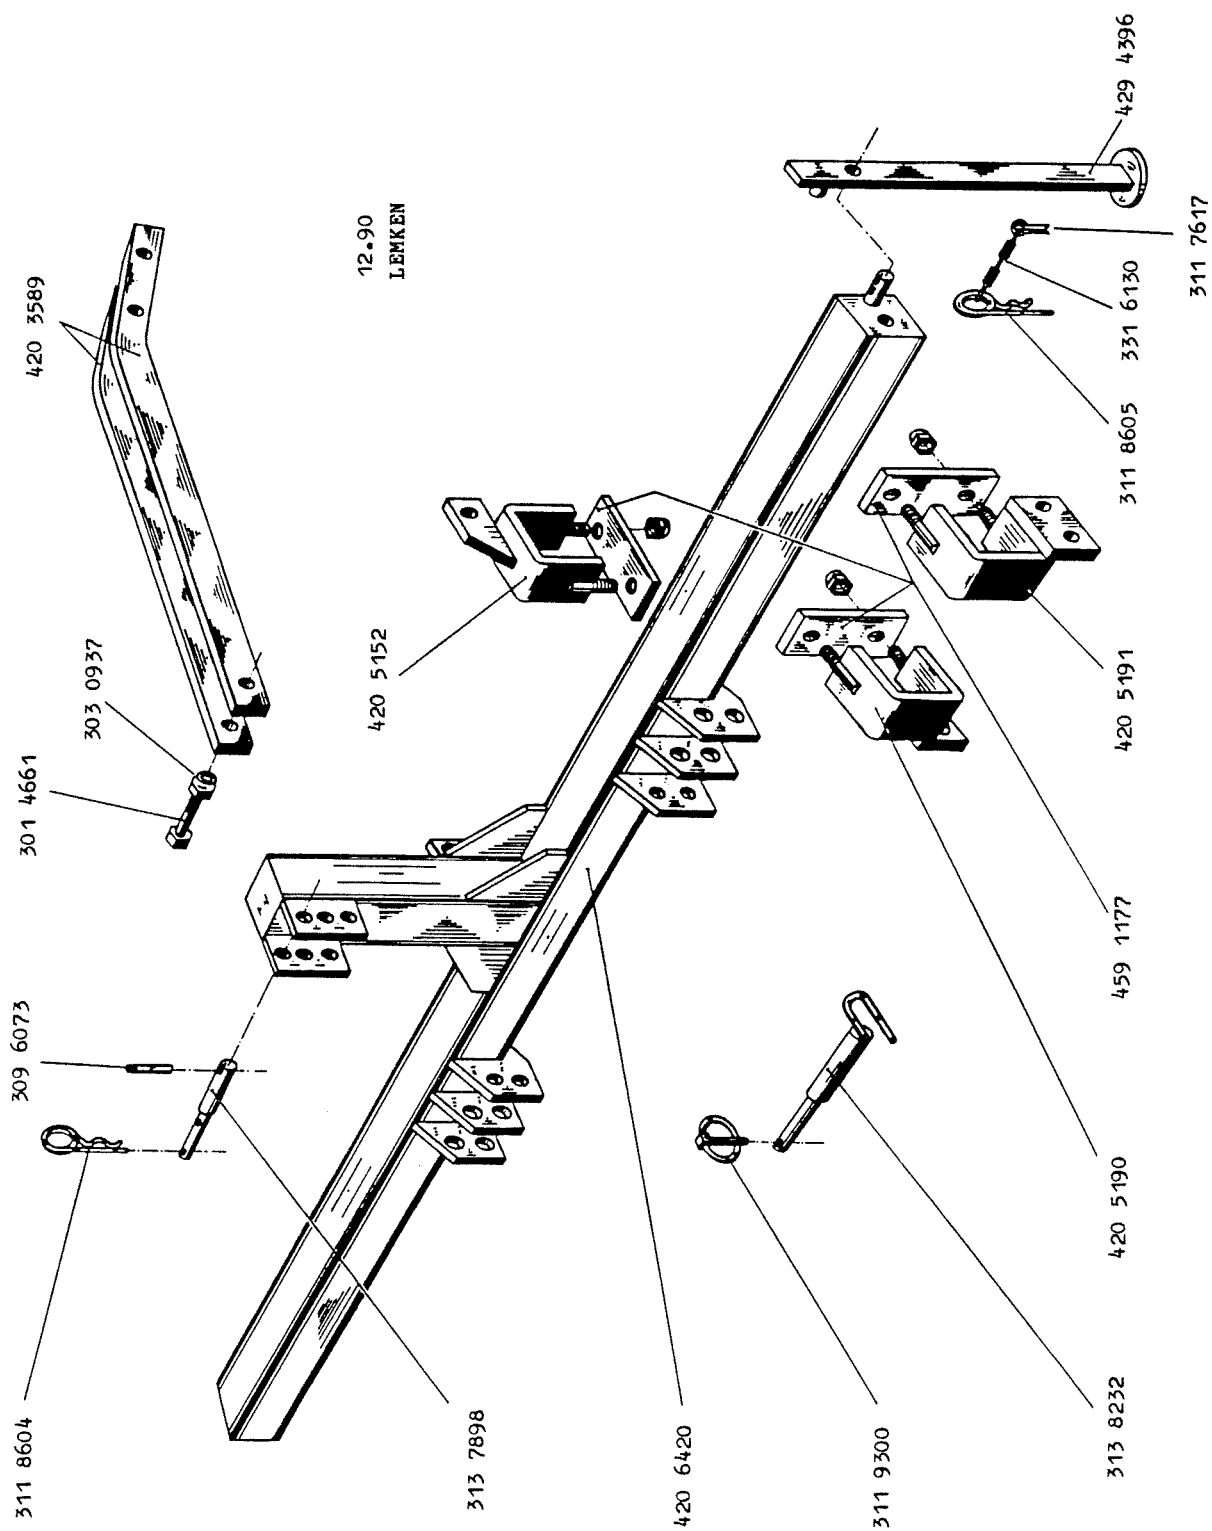

Halm	Melior M2/65 und M3/65	
Blade	Melior M2/65 and M3/65	
Etancon	Melior M2/65 et M3/65	



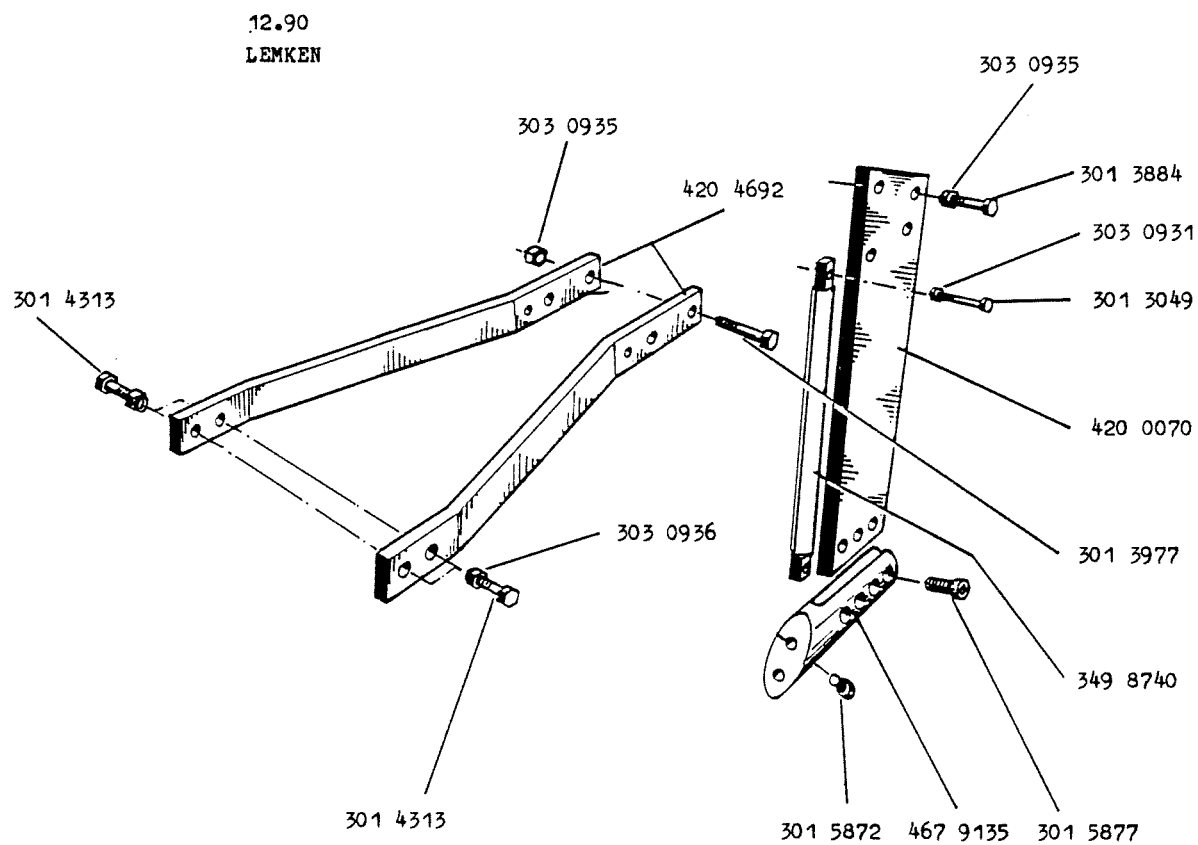


Halm	Melior M2/85 und M3/85	
Blade	Melior M2/85 and M3/85	
Etancon	Melior M2/85 et M3/85	

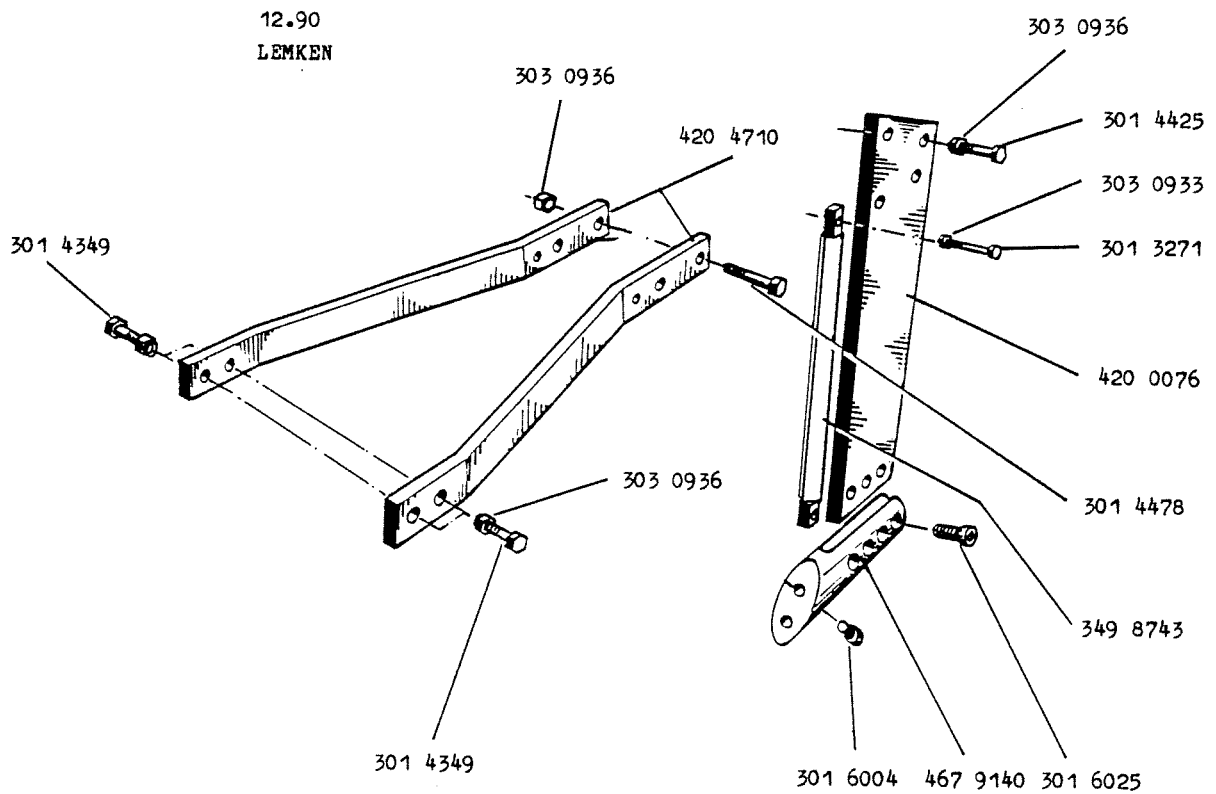




Schare für Melior 65
Shares for Melior 65
Socs pour Melior 65

337 xxxx

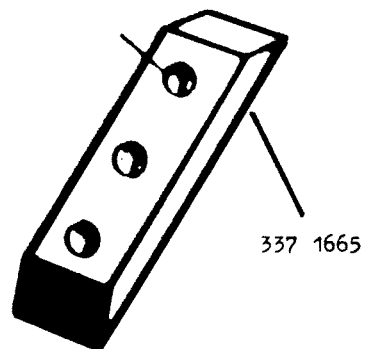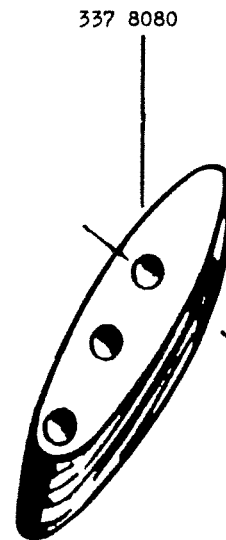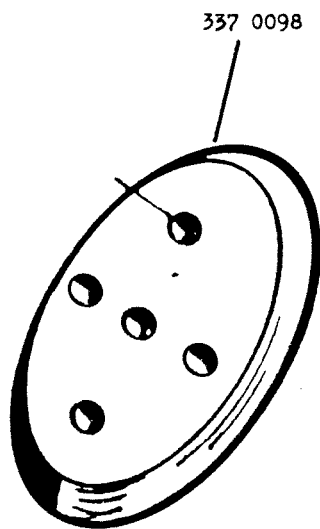


Schare für Melior 85-100
Shares for Melior 85-100
Socs pour Melior 85-100

337 xxx

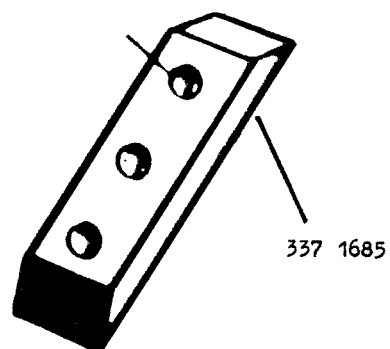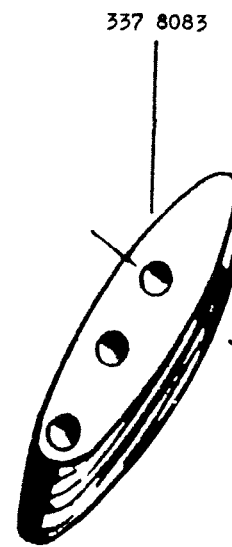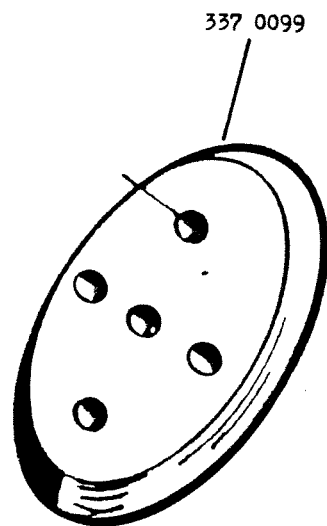

Drainagekegel für Melior 65
Expander for Melior 65
Obus de drainage pour Melior 65


620 7950

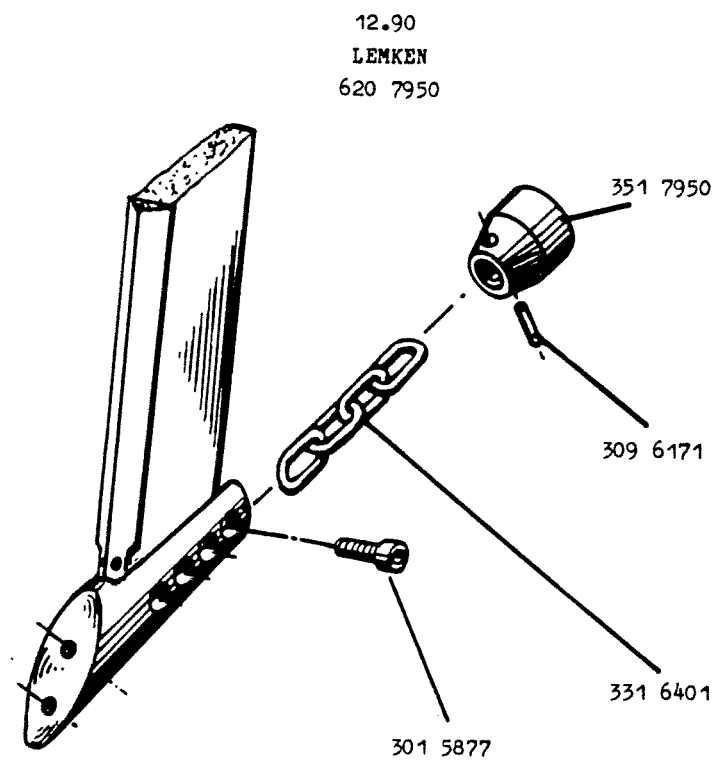

Drainagekegel	D 115x132
Expander	D 115x132
Obus de drainage	D 115x132


620 7960

12.90
LEMKEN
620 7960

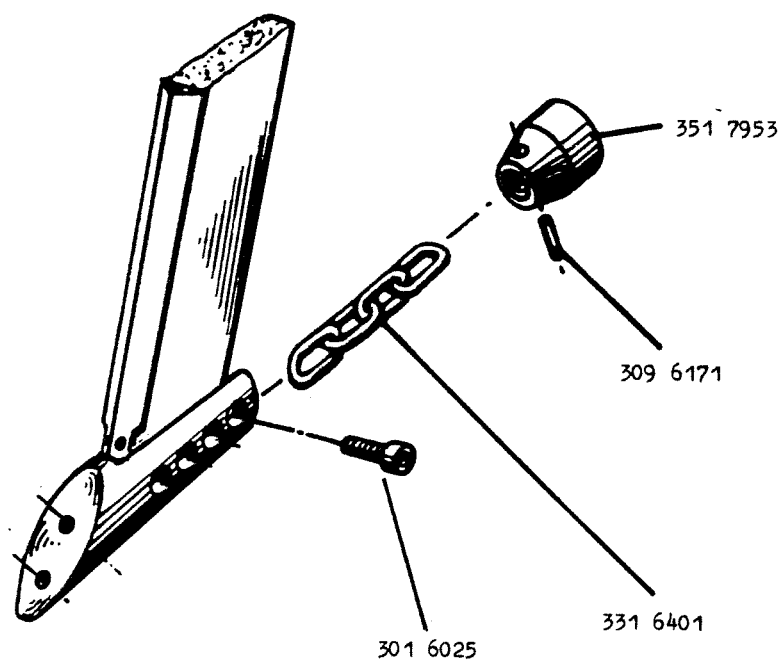

Drainagekegel	D 115x130 R
Expander	D 115x130 R
Obus de drainage	D 115x130 R


620 7970

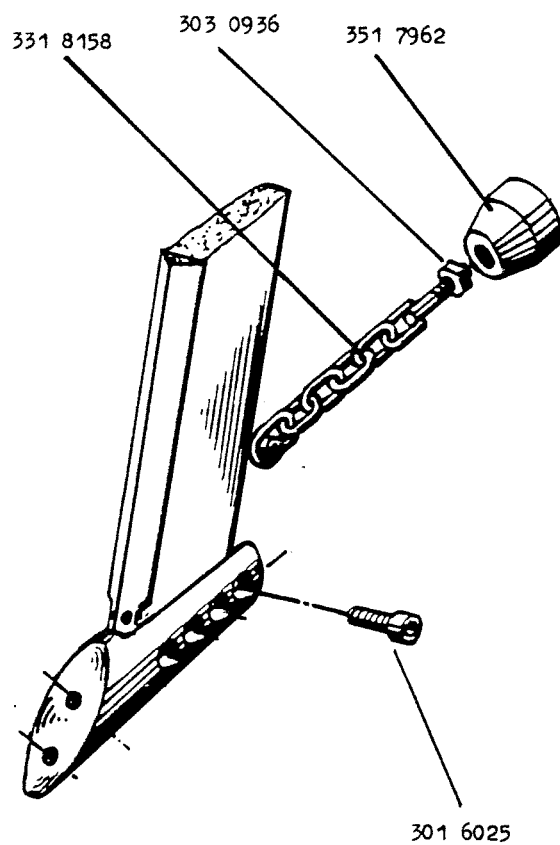

12.90
LEMKEN
620 7970


Stützrad	D320 50x25
Depth wheel	D320 50x25
Roue de support	D320 50x25

647 5130
647 5131

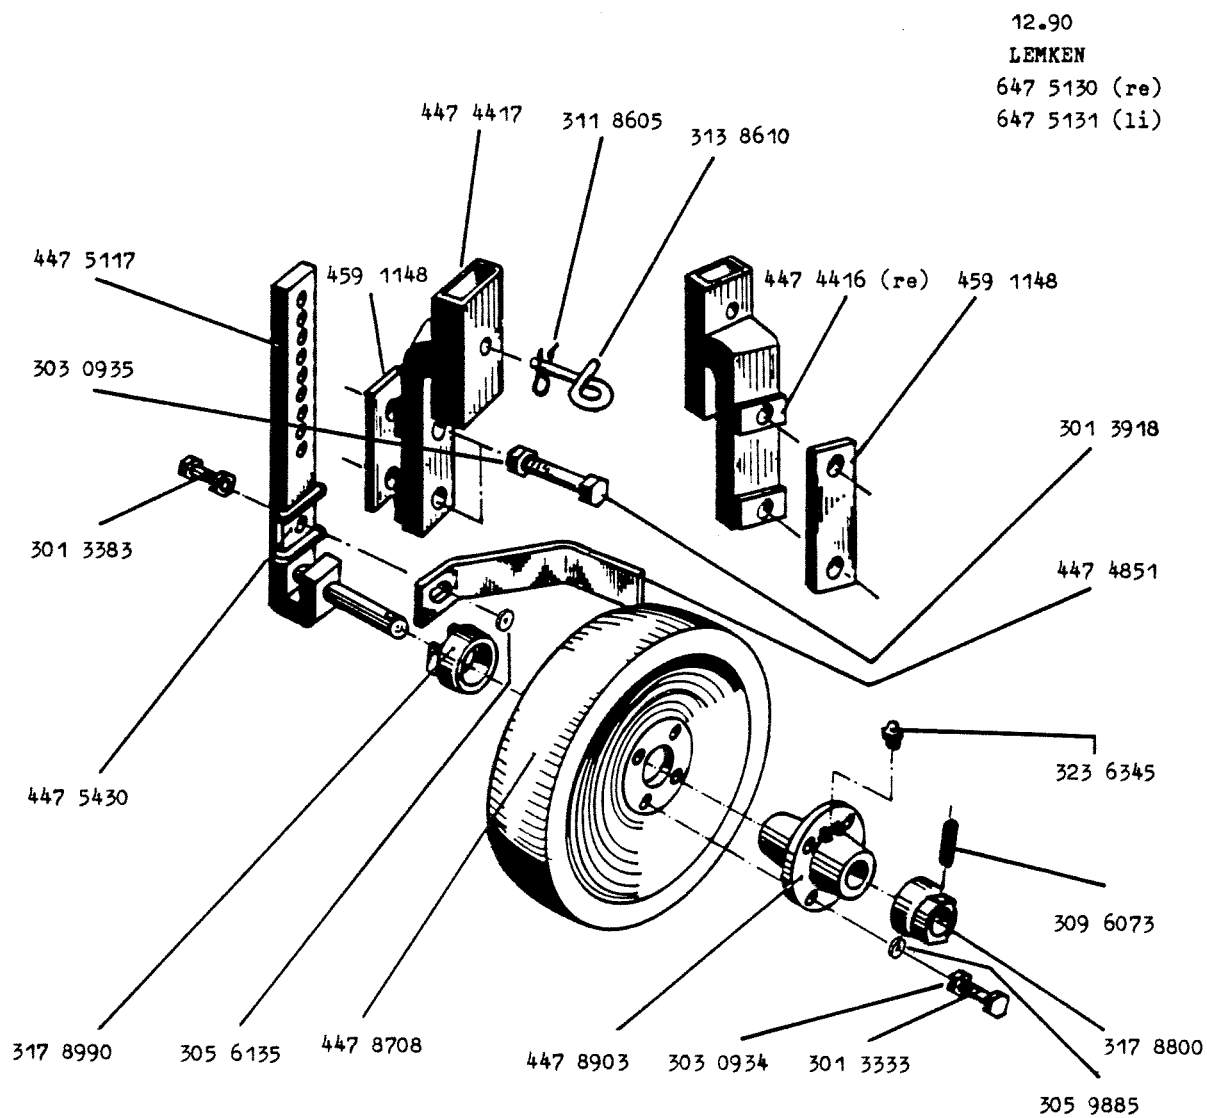


Stützrad	D400	50x30
Depth wheel	D400	50x30
Roue de support	D400	50x30

647	5135
647	5136

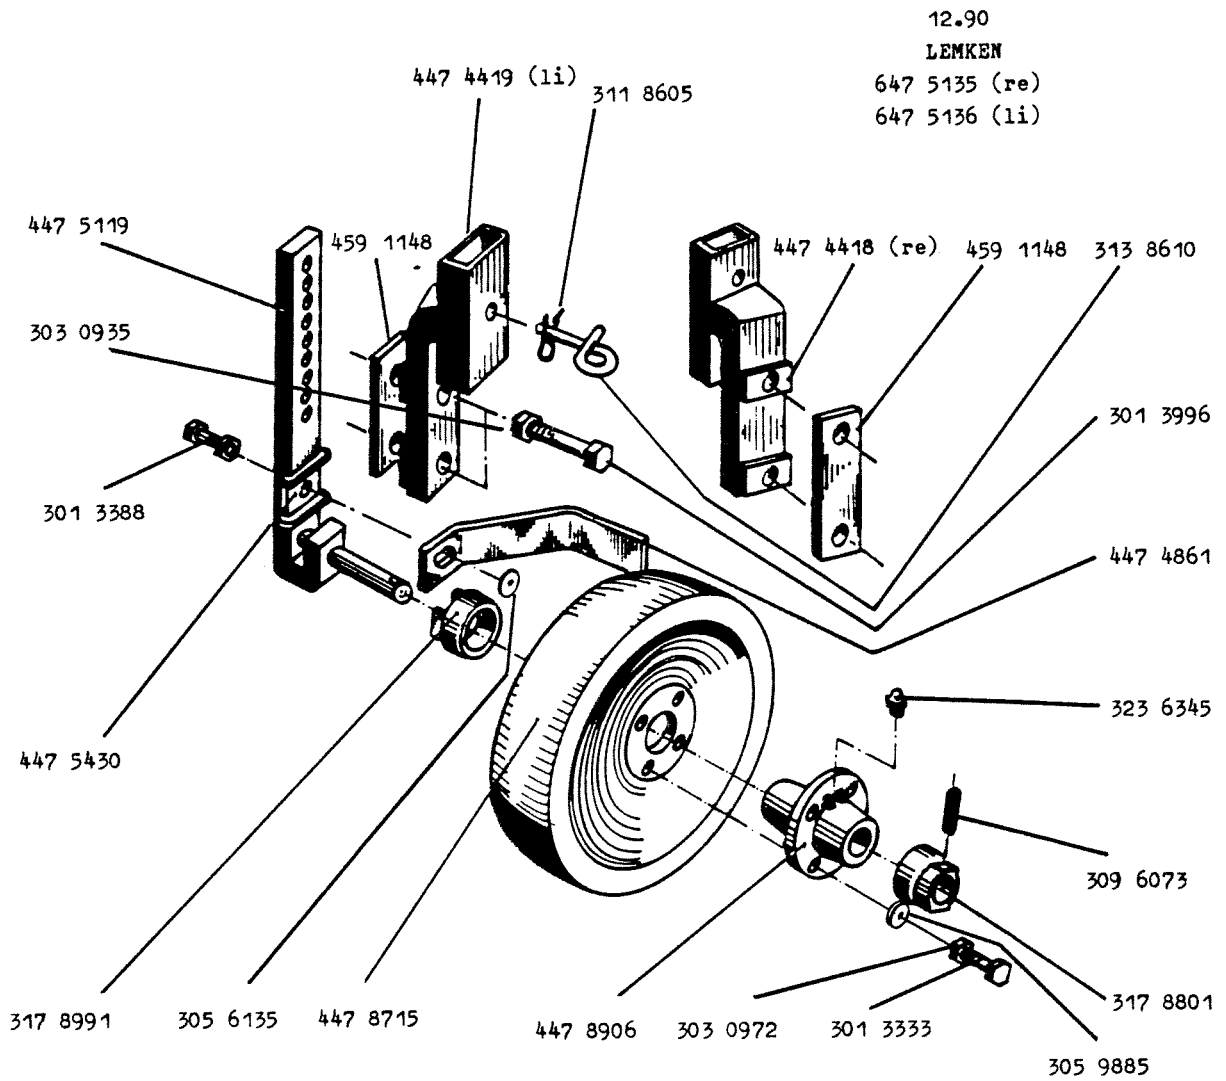

Druckrolle für Melior 85-100
 Pressure roller for Melior 85-100
 Rouleau de pression pour Melior 85-100


647 8726

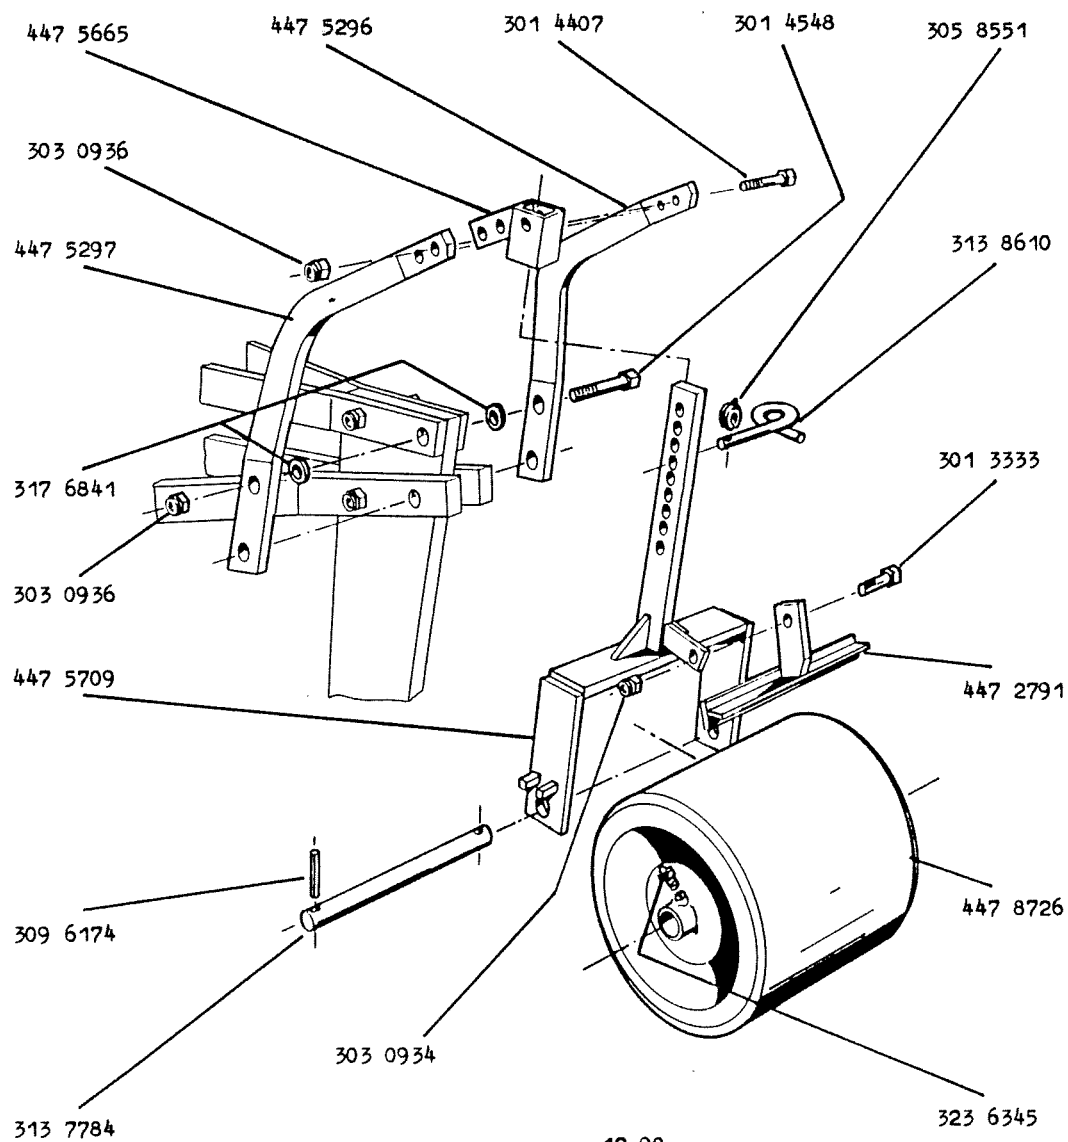

12.90
 LEMKEN
 647 8726

Scheibensech	für Melior 65
Disc coulter	for Melior 65
Coutre a disque	pour Melior 65


657 5100

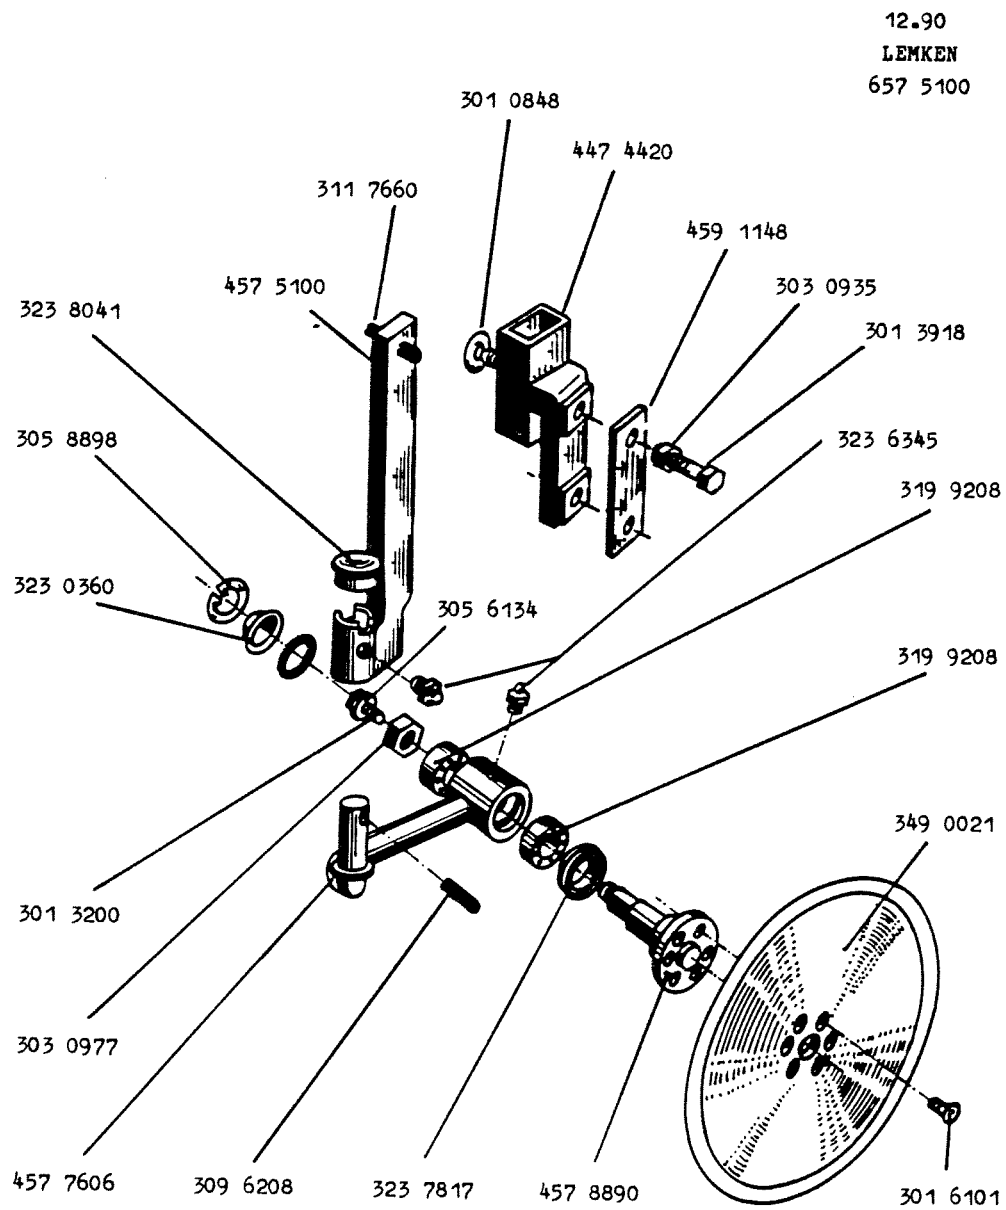

Scheibensech für Melior 85-100
 Disc coulter for Melior 85-100
 Coutre a disque pour Melior 85-100

657 5106

12.90
 LEMKEN
 657 5106

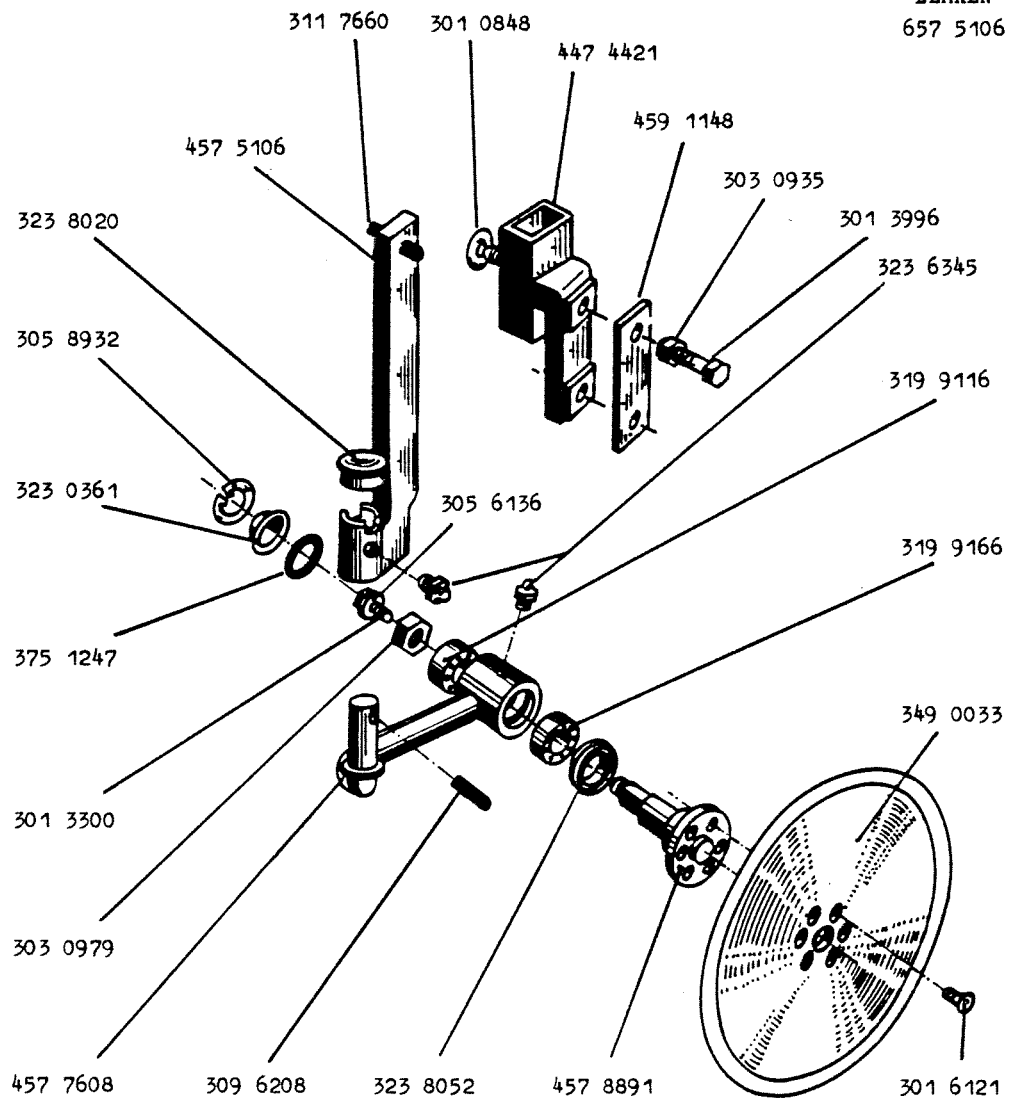

Konsole mit Schar zum Melior 85-100
Bracket with share for Melior 85-100
Console avec soc pour Melior 85-100

667 xxxx

